

AC 1100

Cummins
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	1100,00	880,00	1000,00	800,00	1443,00

fP GDE

GC ;) &

) & z

fDF DE

z & (

GC

%\$!

%

%&

GC " \$ (*

Standard Specifications

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

AC 1100

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QST 30 G4		
		%\$\$' "# "		
		970,00 kw [1300,00HP]		
	L	30,480		
	"	140 x 165		
		14,0:1		
	fl # ı	"# "	1500	
	fl ı	L	154,00	
		L	342,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	60,30		
fl ' # ı	' # "	1111,00		
	' # "	178,80		
	° C	575,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "			
		202,00	151,00	102,00


		Mecc Alte		
		ECO 43-1LN/4		
	Hz	50		
	"	1100,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	1587,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1100	7350,00	4400,00	1776,00	2341,00	1500,00
		fl ı		fl ı	
	"	"	"	"	L
AK 96	11000,00	7500	2300	2517	1500

AC 1100

Cummins
Mecc Alte
D+' &'

1 D+' &'

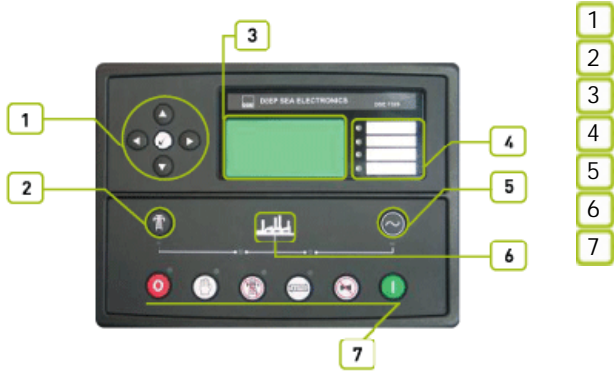

2

"8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

'8G9+' &\$' &&\$' ž

"'8G9+' &\$' '8G9+' &\$'

ž

% &1 *('

žFG&' &žFG(,) ž

ž

AC 1100

Cummins
Mecc Alte
D+ &



f@#@Bt
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#



f&%) +t

f&)(, t

f&% \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž


GA 8

!&+""

ž

AC 1100

Cummins
Mecc Alte
D+ & "

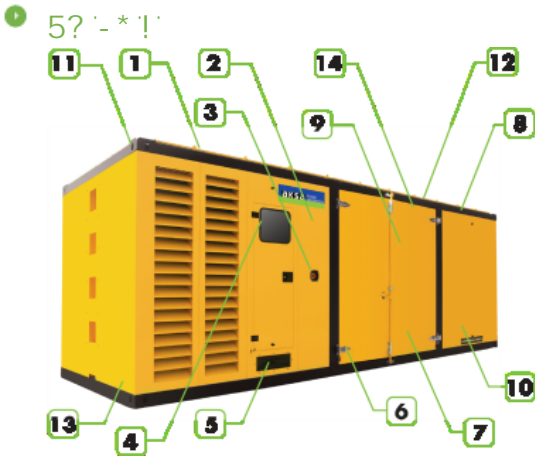

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2517
	L	1500