

AD 770

Doosan
Mecc Alte
D+ &



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	770,00	616,00			

fP GDE

fDF DE

%) & z

z & (

GC ;) &

GC ;) &

GC ;) &

Standard Specifications

z

fl

z

z

fl

z

z

ALTERNATOR

D; A Z 5J F

fl

z

TRANSFER SWITCH

fl

z

AD 770

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan											
Model	P222LE-II											
		<table border="1"> <tr> <td>%\$\$' "# "</td> <td></td> <td></td> </tr> <tr> <td>*) &\$\$' "</td> <td></td> <td></td> </tr> <tr> <td>Q+(&\$\$< DQ</td> <td></td> <td></td> </tr> </table>		%\$\$' "# "			*) &\$\$' "			Q+(&\$\$< DQ		
%\$\$' "# "												
*) &\$\$' "												
Q+(&\$\$< DQ												
	L	21,930										
	"	128 x 142										
		14,0:1										
fl # ı	"# "	1500										
fl ı	L	40,00										
	L	110,00										
AbsorbedAirDischargeReSourceKey.Text	' # "	42,50										
fl ' # ı	' # "	829,00										
	' # "	119,90										
	° C	635,00										
		24 V d.c.										
	Load	<table border="1"> <tr> <td>%\$\$ı</td> <td>'+)ı</td> <td>) \$ı</td> </tr> <tr> <td># "</td> <td></td> <td></td> </tr> </table>		%\$\$ı	'+)ı) \$ı	# "					
%\$\$ı	'+)ı) \$ı										
# "												
		162,60	119,30 79,50									

	Mecc Alte		
	ECO 40-VL/4		
	Hz	50	
	"	750,00	
7cg'		0,80	
		3	
fl ı		400/230	
	A	1084,00	

		fl ı		fl ı	
	"	"	"	"	L
AD 770	4720,00	3630,00	1550,00	2163,00	1000,00
		fl ı		fl ı	
	"	"	"	"	L
MS 85	6275	5297	1606	2656	1000

AD 770

Doosan
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 770

Doosan
Mecc Alte
D+ &''

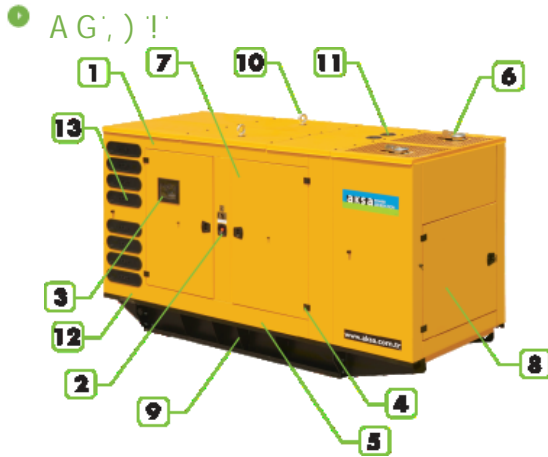

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000