


AC 500

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	500,00	400,00	455,00	364,00	656,00

fP GDE

GC,) &

,) & z

fDF DE

%\$1

%

%&

GC" \$(**

z&(

GC

Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

AC 500

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QSX 15 G6		
		% \$ \$	"# "	
		459,00 kw [615,00HP]		
	L	15,000		
	"	137 x 169		
		17,0:1		
	fl # ı	"# "	1500	
	fl ı	L	91,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,00		
	' # "	637,00		
fl ' # ı	' # "	82,20		
	° C	515,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		95,90	74,30	51,30


		Mecc Alte		
		ECO 40-3S		
	Hz	50		
	"	500,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	721,00		

		fl ı		fl ı	
	"	"	"	"	L
AC 500	3815,00	3407,00	1550,00	2103,00	850,00
		fl ı		fl ı	
	"	"	"	"	L
MS 80	4815	4810	1606	2615	850

AC 500

Cummins
Mecc Alte
D+' &'

1 D+' &'

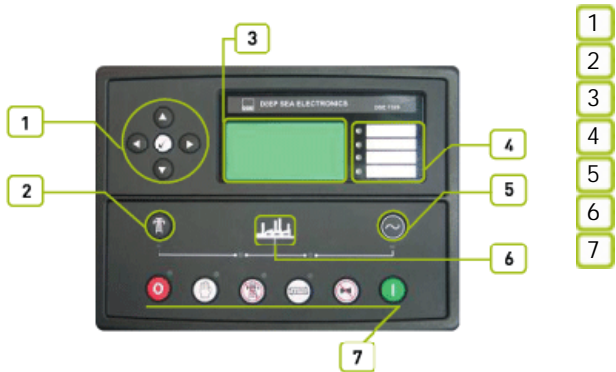

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$
&&\$' ž

8G9+' &\$

8G9+' &\$

% &1*(

žFG&' &žFG(,) ž

AC 500

Cummins
Mecc Alte
D+ &''

f@#@Bt
f@#@!@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$\$!*!&

6G'9B'*\$\$\$\$!*!(

f&)% +t

f&)(, t

f&)% \$t

GA 8

!&+""

"

%, !&*(

"

&(\$)

ž

ž

ž

ž

"

"

AC 500

Cummins
Mecc Alte
D+ &''



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850