

AC 1100 K

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	1100,00	880,00	1000,00	800,00	1443,00

fP GDE

GC,) &

,) & z

fDF DE

z & (

GC

Standard Specifications

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

AC 1100 K

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		KTA 38 G5		
		% \$ \$' "# "		
		970,00 kw [1300,00HP]		
	L	37,800		
	"	159 x 159		
		13,9:1		
	fl # ı	"# "	1500	
	fl ı	L	135,00	
		L	370,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	72,70		
fl ' # ı	' # "	1489,00		
	' # "	198,36		
	° C	513,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		209,00	161,00	113,00

		Mecc Alte		
		ECO 43-1LN/4		
	Hz	50		
	"	1100,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	1587,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1100 K	8600,00	4470,00	1770,00	2370,00	1500,00
		fl ı		fl ı	
	"	"	"	"	L
AK 96	12250.00	7500	2300	2517	1500

AC 1100 K

Cummins
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

" % , ! & * ("

& (\$)

ž


ž

! & + " " "

ž

AC 1100 K

Cummins
Mecc Alte
D+ &

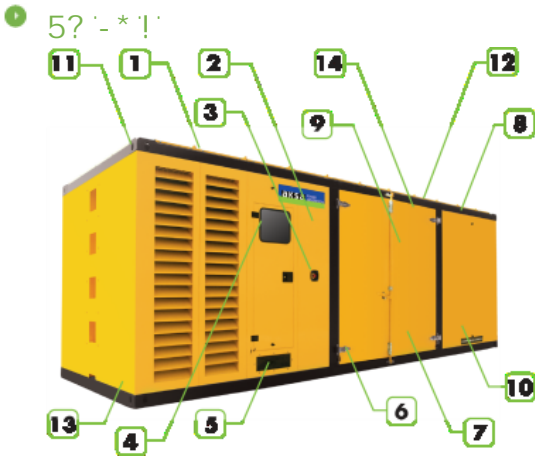

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2517
	L	1500