

# APD 1425 M

Mitsubishi

D+ &



**ISO8528**      GC , ) &-

**SZUTEST**      GC - \$\$\$%

**CE**

**2000/14/EC**      &\$\$\$#( #

z) \$ z' z' D:


	kw	kw	kw	Amp
400/230	1425,00	1140,00	1290,00	1862,00

fP GDE      GC , ) &      z & (      GC

, ) & z      fDF DE      % \$ i      %      % &      GC " \$ ( \* "      GC

**Standard Specifications**

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

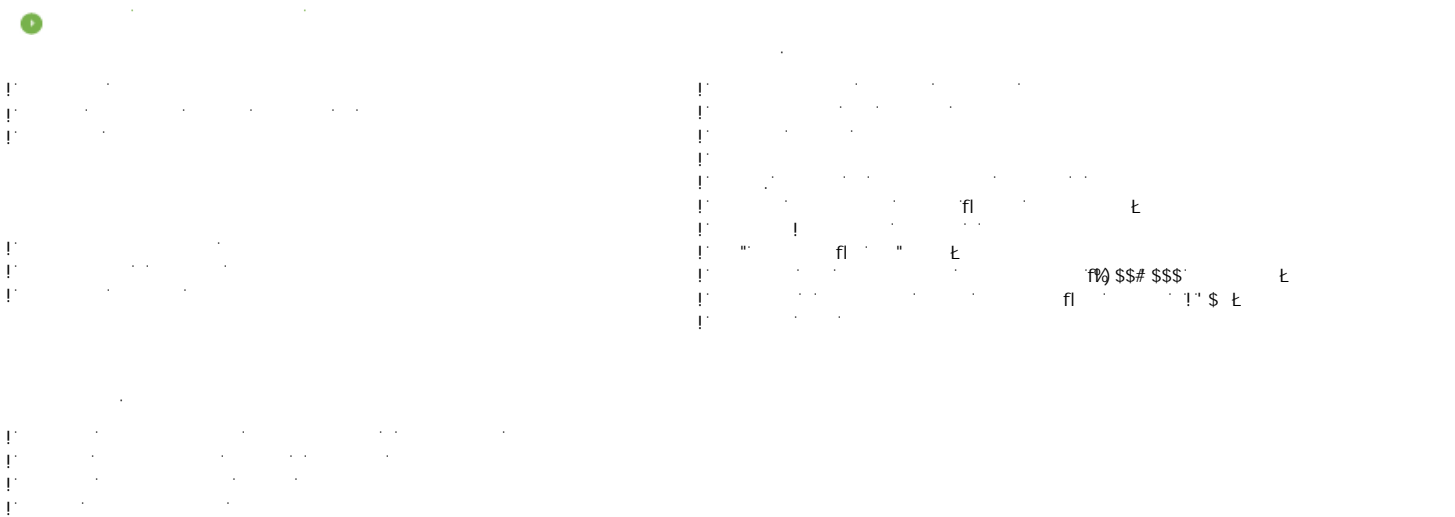

TRANSFER SWITCH

# APD 1425 M


Mitsubishi

D+' &'

Manufacturer		Mitsubishi
Model		S12R-PTA
		%\$\$' "# "
		1220,00 kw [1635,00HP]
	L	49,000
	"	170X180
		14:1
	fl # ı	"# " 1500
	fl ı	L 180,00
	L	335,00
AbsorbedAirDischargeReSourceKey.Text	' # "	98,00
	' # "	1800,00
		24 V d.c.
	Load	%\$\$ı
	# "	
		260,60

		ECO43-2LN/4
	Hz	50
	"	1300,00
7 cg'		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 1425 M	9500,00	4400,00	2100,00	2200,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 96.	13170	7500	2300	2500+1300	1900

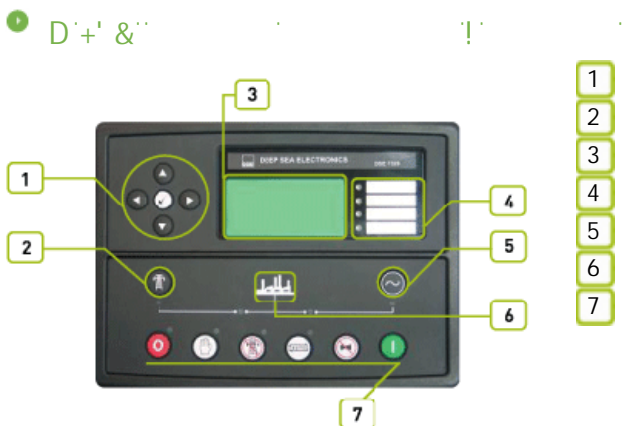



# APD 1425 M

Mitsubishi

D+&''

f@z@Bl  
f@z@Bl  
" " "  
" " " "  
f@z@Bl

971

f&%) +L

f&)(, L

f&% \$L

6G'9B '\* \$-) \$

6G'9B '\* %\$\$\$!\*&

6G'9B '\* %\$\$\$!\*(

GA 8

% , !&\*(


&(\$)

!&+'''

# APD 1425 M

Mitsubishi

D+' &'

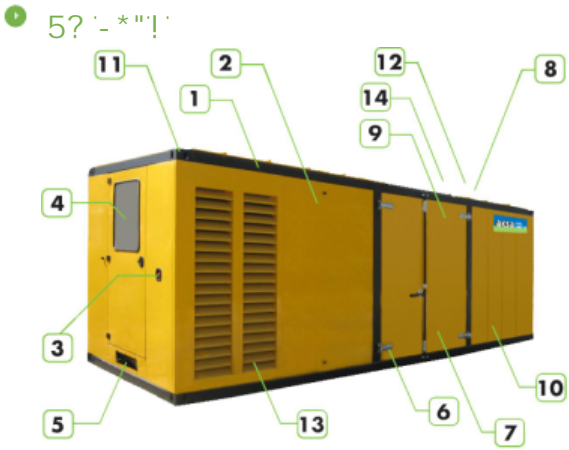

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cables out locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2500+1300
	L	1900