


AJD 275

John Deere
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC
&\$\$\$(#
z) \$ z'z' D:

	"	kw	"	kw	Amp
400/230	275,00	220,00	250,00	200,00	361,00

fDGE GC,) &
) & z fDFD %s1 % %& GC "\$ (** z& GC

Standard Specifications

z
fi ! E
z
z

ALTERNATOR
fi " E
fD \$\$\$ \$\$\$ E
fi " \$ E

TRANSFER SWITCH

!

AJD 275

John Deere
Mecc Alte
D+' &''

Manufacturer		John Deere		
Model		6068HFG55		
		%\$\$' "# "		
		250,00 kw [355,00HP]		
	L	6,800		
	"	106x127		
		17,2:1		
	fl # ı	"# "	1500	
	fl ı	L	33,00	
		L	31,20	
AbsorbedAirDischargeReSourceKey.Text	' # "	14,50		
	' # "	301,00		
	' # "	37,30		
	° C	523,00		
		12 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	53,00	37,80	26,50


		Mecc Alte		
		ECO 38-1LN/4		
	Hz	50		
	"	250,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	361,00		
Temperature		H		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AJD 275	1970,00	2750,00	1300,00	1350,00	470,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 60	2680	3960	1356	2097	470

AJD 275

John Deere
Mecc Alte
D+' &'

1 D+' &'

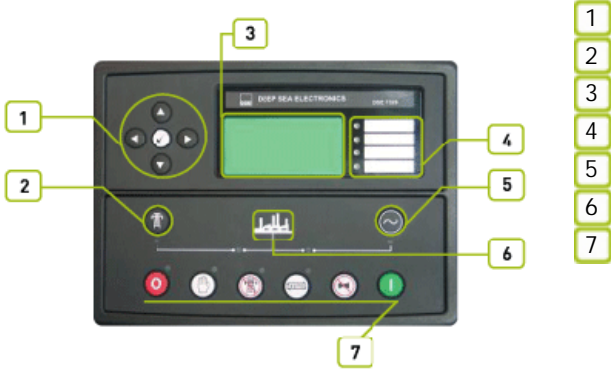

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž ž "8G9+' &\$' 8G9+' &\$' % &1 '*(' žFG&' &žFG(,) ž

AJD 275

John Deere
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&)% +t

f&)(, t

f&)% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AJD 275

John Deere
Mecc Alte
D+ &

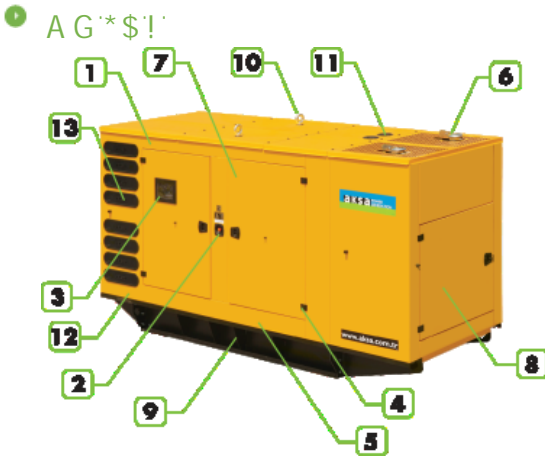

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470