

AC 350

Cummins
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	350,00	280,00	300,00	240,00	433,00

fP GDE

GC ;) &

) & z

fDF DE

%\$1

% % &

GC " \$ (*

z & (

GC

Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

AC 350

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QSL9-G5		
		% \$ \$	"# "	
		310,00 kw [415,00HP]		
	L	8,800		
	"	114 X 145		
		16,8:1		
	fl # ı	"# "	1500	
	fl ı	L	26,50	
		L	28,60	
AbsorbedAirDischargeReSourceKey.Text	' # "	20,40		
	' # "	475,00		
	' # "	31,20		
	° C	560,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		63,00	46,00	31,00


		Mecc Alte		
		ECO38-3LN		
	Hz	50		
	"	350,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	505,00		

		fl ı		fl ı	
	"	"	"	"	L
AC 350	2630,00	2936,00	1300,00	1869,00	450,00
		fl ı		fl ı	
	"	"	"	"	L
MS 60	3450	3960	1356	2097	470

AC 350

Cummins
Mecc Alte
D+' &'

1 D+' &'

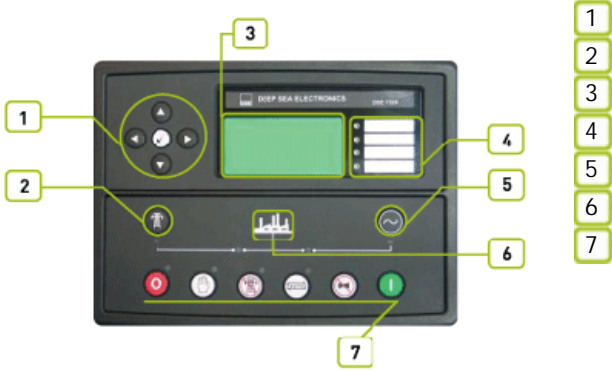

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

% &1 *(' žFG' &žFG(,) ž

AC 350

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 350

Cummins
Mecc Alte
D+ & "

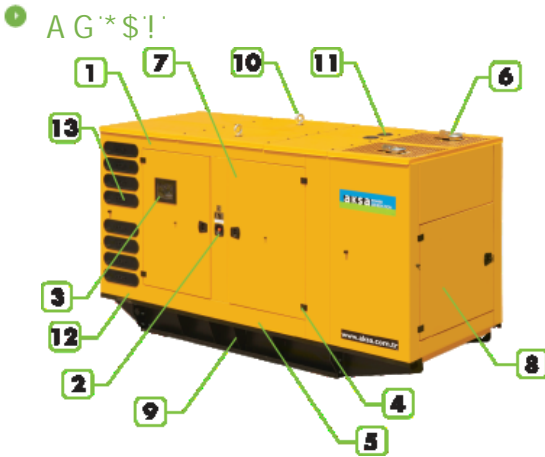

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1356
fl "L	"	3960
fl "L	"	2097
	L	470