


# AD 220

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	220,00	176,00	200,00	160,00	288,00

fP GDE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z 5J F

## TRANSFER SWITCH

# AD 220

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P086TI		
		% \$\$\$ "# "	
		% - \$\$\$ "	
		Q* + \$\$\$ < DQ	
	L	8,070	
	"	111X139	
		16,4:1	
	fl # ı	"# "	1500
	fl ı	L	15,50
		L	48,50
AbsorbedAirDischargeReSourceKey.Text	' # "	12,10	
	' # "	250,00	
	' # "	34,00	
	° C	580,00	
		24 V d.c.	
	Load	% \$ı	'+)ı
	# "	) \$ı	
		43,10	31,70 21,10


		Mecc Alte
		ECO 38 2SN/4
	Hz	50
	"	200,00
7cg'		0,80
		3
	fl ı	400/230
	A	288,00
Temperature		H

		fl ı		fl ı	
	"	"	"	"	L
AD 220	1800,00	2688,00	1150,00	1624,00	380,00
		fl ı		fl ı	
	"	"	"	"	L
AK 50	2175	3400	1217	1938	380

AD 220

Doosan  
Mecc Alte  
D+' &'

1 D+' &'

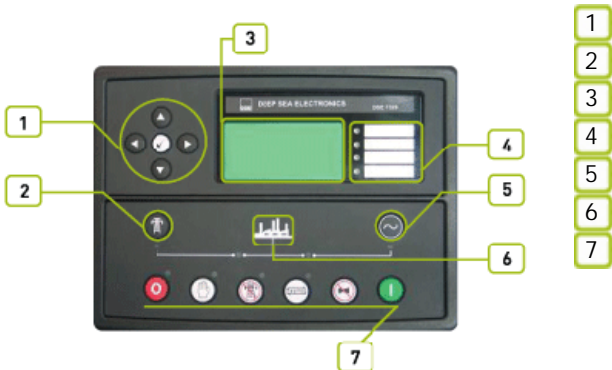

2

8G9ž +' &\$ž ) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

"8G9+' &\$ž '8G9+' &\$ž

ž

% &l \*('

žFG&' &žFG(,) ž

ž

# AD 220

Doosan  
Mecc Alte  
D+ &

f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

f&%) +t

f&)(, t

f&% \$t

6G'9B '\* \$-) \$

6G'9B '\* %\$\$\$! \*!&

6G'9B '\* %\$\$\$! \*!(

GA 8


%, !&\* (

&(\$)

!&+""

# AD 220

Doosan  
Mecc Alte  
D+ &''

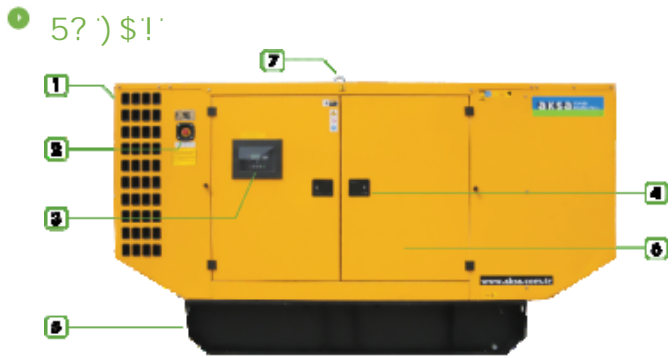

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1217
fl "L	"	3400
'fl "L	"	1938
	L	380