

APD 250 A

Aksa
Aksa P 602



| | | |
|--------------------------------------|--------|----------------|
| Manufacturer | | Aksa |
| Model | | A6CRX98TI |
| | | %\$\$ "# " |
| | | &&\$\$\$ " " |
| | | Q-) \$\$\$< DQ |
| | L | 9,720 |
| | " | 126 x 130 |
| | | 16,5:1 |
| | fl # ı | "# " 1500 |
| | fl ı | L 24,00 |
| | | L 54,00 |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 14,60 |
| | ' # " | 265,00 |
| | ' # " | 40,00 |
| | | 24 V d.c. |
| | Load | \$\$\$ı |
| | # " | |
| | | 51,90 |

| | | |
|-----|------|---------|
| | | Aksa |
| | | AK4184 |
| | Hz | 50 |
| | " | 230,00 |
| 7cg | | 0,80 |
| | | 3 |
| | fl ı | 400/230 |
| | A | 331,00 |

| | | | | | |
|-----------|---------|---------|---------|---------|--------|
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| APD 250 A | 2645,00 | 2900,00 | 1400,00 | 2050,00 | 525,00 |
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| APD 250 A | 3380,00 | 3900 | 1460 | 2170 | 525 |

APD 250 A

Aksa
Aksa P 602



9B: 9B
9b[]bY'gdYYX"
C]'dfYggi fY"
7cc'UbhY'a dYfUhi fY"
F i b' hja Y"
6UHYfmj c'rg"
7cbZ[i fUV'Y hja]b["
; 9B9F 5HCF
J c' hU[Y f@ @B' "
7i ffYbhf@&!@ E"
: fYei YbVW"
A 5-BG
J c' hU[Y f@ @B' "
: fYei YbVW"
A U]bg'fYUXn"
A U]bg'YbUV'YX"
; Yb"GYhfYUXn"
; Yb"GYhYbUV'YX"

K 5F B-B;
7\Uf[Y Z]i fY"
6UHYfm@ck #][\] c' hU[Y"
: U] h' ghcd"
@ck #][\ [YbYfUhc'f j c' hU[Y"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
Cj Yf# bXYf'gdYYX"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
G<I H8CK BG
: U] h' ghUf"
9a Yf[YbVW'ghcd"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
Cj Yf# bXYf'gdYYX"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
I bXYf#j Yf[YbYfUhc'f c' hU[Y"
C]'dfYggi fY'gYbgcf'cdYb"
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"
9@97 HF =75@HF D
: YbYfUhc'f j YfW ffYbh"


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k]h' h'Ya dYfUhi fYz
dfYggi fYz dYfVW'bhU[Y f'k Ufb]b[#]i h'Xck b# 'YVW'VW' h'f'dL
@c'W'gYh]b['dUfUa YHfg'UbX'a cb]h'f]b['Zca 'D7 h'
V'c'bfcc' a cXi 'Y'k]h' I G6 V'c'bbYVW]cb'fa Ul '* 'a H'

9'YVW]W' GUZYhm#9A 7 V'c'a dUfV]]hm6G'9B *\$-) \$
9'YVW]W' Vi g]bYgg'Yei]da Ybh
6G'9B *\$!*\$!&9A 7]a a i b]mighUbxUfX"
6G'9B *\$!*\$!*('9A 7 Ya]gg]cb'ghUbxUfX"

'6UHYfmVUf[Yf]g'a Ubi ZVW' fYX'k]h' 'gk]h'W]b[!a cXY'UbX'GA 8 'YVW'bc'c[mUbx'ih\Ug \] [\ YZ]V]bYVW' 6UHYfmVUf[Yf
a cXY'gfci hdi hJ !=VUfUWV'f]gh]W]g'j YfmV'cgY' h'c'gei UfY'UbX'ci hdi h]g']'Ua dYfz% z']' Zcf'%&j' c'hUbX'&+Z']' Zcf'&'(]'
#bdi h% , ' !&* (j c'h57 "' Dfc]bY'&(\$) \Ug'Z' mci hdi hg\chVW]hdfchVW]cb'UbX'ihVWb'VY i gYX'Ug'U'W'ffYbhgci fVW"
Dfc]bY'&(\$)' VUf[Yf\Ug \] [\ YZ]V]bYVW'cb["]Z'Z' c'k ZU]i fY'fUfYz'] [\ hk Y] [\ hUbX' c'k \ YUhfUX]UfYX']b
UVV'cfXUbW'k]h']'bYUf'U'fYbUf]j Yg' H\Y'VUf[Yf]g'Z]h'YX'k]h' U'dfchVW]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[Y'Z]
fY'UmV'c] VYh'YYb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei]ddYX'k]h' F: =Z]h'f' h'c'fYXi V'Y'YVW]W'bc]gY'fUX]UfYX
Zca 'h'Y'XY'jVW"; Uj Ub]W' m]gc'UfYX']bdi hUbX'ci hdi h]m]W'm(_J' Zcf \] [\ fY']UV]]h'

APD 250 A

Aksa
Aksa P 602

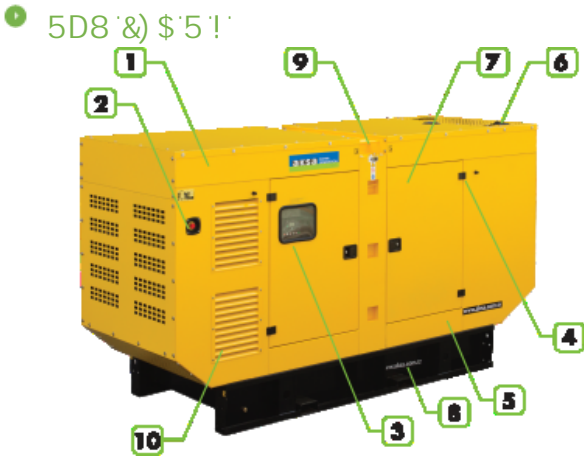

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set (When you look at the Gen.Set. from Alternator)
- 4 Oil could be drained via valve and a hose
- 5 Exhaust system in the canopy.
- 6 special large access doors (marine type) for easy maintenance
- 7 Base frame -fuel tank.
- 8 Lifting points similar to ISO container , located on each top corner of the canopy.
- 9 Sound proofing materials.

| | | |
|-------|---|------|
| | " | 1460 |
| fl "L | " | 3900 |
| fl "L | " | 2170 |
| | L | 525 |