


APD 825 M

Mitsubishi

D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

| | " | kw | " | kw | Amp |
|---------|--------|--------|--------|--------|---------|
| 400/230 | 825,00 | 660,00 | 750,00 | 600,00 | 1084,00 |

fP GDE

GC ;) &

fDF DE

z&(

GC

,) & z

%\$!


%

%&

GC " \$(**

Standard Specifications

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Fuel tank under the base frame
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

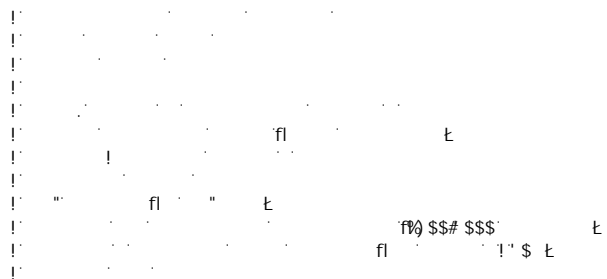

TRANSFER SWITCH

APD 825 M

Mitsubishi


D+' &'



| | | |
|--------------------------------------|--------|-------------------------|
| Manufacturer | | Mitsubishi |
| Model | | S6R2-PTAA |
| | | %\$\$' "# " |
| | | 710,00 kw [951,00HP] |
| | L | 29,960 |
| | " | 170X220 |
| | | 14:1 |
| | fl # ı | "# " 1500 |
| | fl ı | L 94,00 |
| | L | 132,00 |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 60,00 |
| | ' # " | 726,00 |
| | | 24 V d.c. |
| | Load | %\$\$ı |
| | # " | |
| | | 156,70 |

| | | |
|-------|------|-----------|
| | | ECO40VL/4 |
| | Hz | 50 |
| | " | 800,00 |
| 7 cg' | | 0,80 |
| | | 3 |
| | fl ı | 400/230 |

| | | | | | |
|-----------|---------|---------|---------|---------|---------|
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| APD 825 M | 6360,00 | 4100,00 | 1800,00 | 2200,00 | 1300,00 |
| | | fl ı | | fl ı | |
| | " | " | " | " | L |
| MS 86 | 7680 | 5350 | 1800 | 2530 | 1300 |

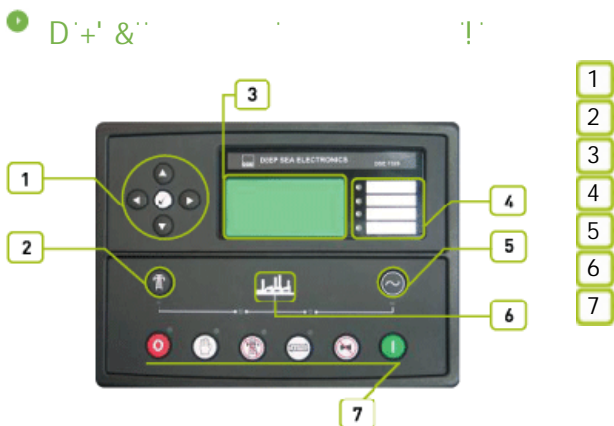

APD 825 M

Mitsubishi

D+ & "



f@z@Bl
f@!@!@t
" " "
" " " "
f@z@Bl

971

f&) , t
f&%) +t
f&% \$t

6G'9B '* \$-) \$
6G'9B '* %\$\$\$! *!&
6G'9B '* %\$\$\$! *!(


GA 8

%, !&* (") z z " !&+"" " z
&(\$) z z " z

APD 825 M

Mitsubishi

D+ &

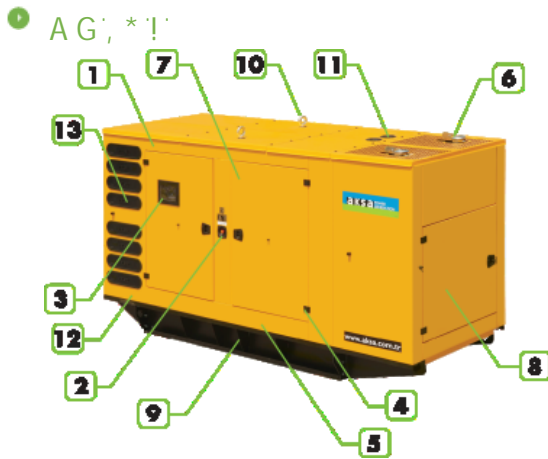

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

| | | |
|-------|---|------|
| | " | 1800 |
| fl "L | " | 5350 |
| fl "L | " | 2530 |
| | L | 1300 |