

# APD 1650 M

Mitsubishi

D+ & "



**ISO8528** GC , ) &-

**SZUTEST** GC - \$\$\$%

**CE**

**2000/14/EC** &\$\$\$#( #

z) \$' z' \$z 'D:

	"	kw	"	kw	Amp
400/230	1650,00	1320,00	1500,00	1200,00	2168,00

fP GDE' GC , ) & "

fDF DE' %& GC " \$(\* z&( GC

, ) & z %\$1 % %&

**Standard Specifications**

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110



TRANSFER SWITCH

# APD 1650 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S12R-PTAA2
		%\$\$' "# "
		1441,00 kw [1932,00HP]
	L	49,000
	"	170 X 180
		13.5:1
	fl # ı	"# "
	L	180,00
	L	317,00
AbsorbedAirDischargeReSourceKey.Text	' # "	120,00
	' # "	1800,00
	° C	318,00
		24 V d.c.
	Load	%\$\$ı
	# "	
		317,00

		ECO46-1S/4
	Hz	50
	"	1500,00
7cg		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 1650 M	13000,00	5000,00	2200,00	3100,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 99	18000	9000	2800	3478/4452	2200

D+' &'

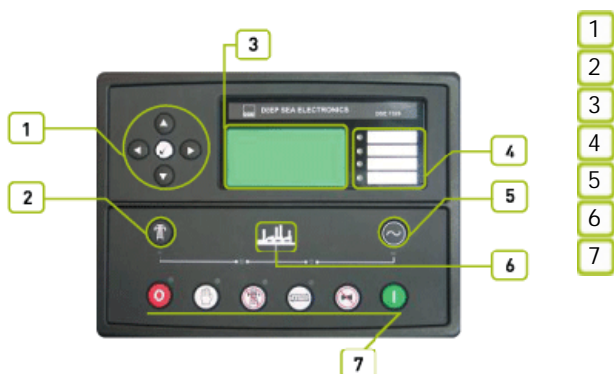

# APD 1650 M

Mitsubishi

D+' &'


- 1 8G9ž ' + ' &\$ž ) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+' &\$ ž fi  
&&\$ ž  
"8G9'+' &\$  
'8G9'+' &\$ ž  
% &I '\* ( ž  
žFG&' &žFG(, ) ž ž



# APD 1650 M

Mitsubishi

D+ &''

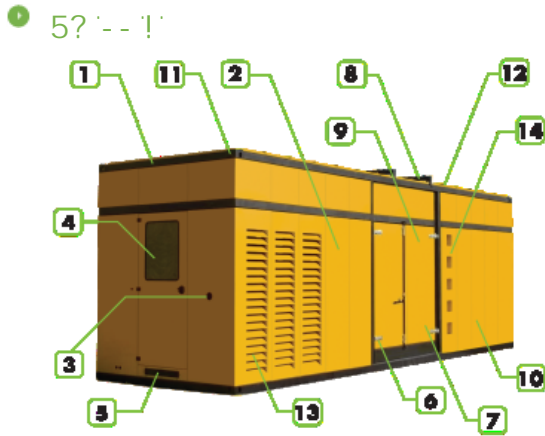

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3478/4452
	L	2200