

# AC 2500

Cummins  
Stamford  
D+ &



ISO8528

GC , ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	2500,00	2000,00	2000,00	1600,00	2886,00

fP GDE GC , ) &


fDF DE % \$1 % % & GC " \$ ( \* z & GC

## Standard Specifications

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

# AC 2500

Cummins  
Stamford  
D+ &

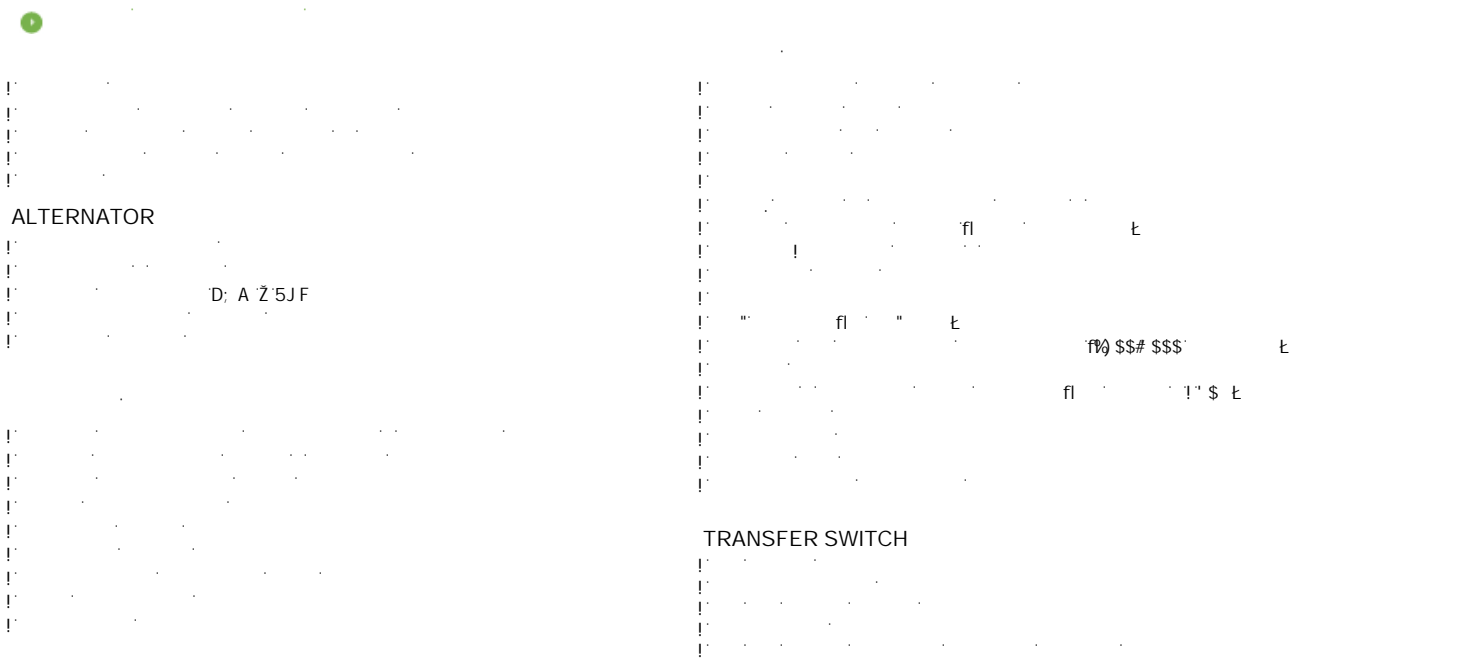


# AC 2500

Cummins  
Stamford  
D+' &'

Manufacturer	Cummins		
Model	QSK 60 G13		
	%\$\$' "# "	2164,00 kw [2901,00HP]	
	L	60,200	
	"	159 x 190	
		14,5:1	
fl # Ł	"# "	1500	
fl Ł	L	280,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	154,40	
	' # "	293,20	
	° C	507,00	
		24 V d.c.	
	Load	%%\$! "	'+)
	# "	)\$!	
		399,00	302,00 210,00

	Stamford	
	LVS1804R	
	Hz	50
	"	2410,00
7cg'		0,80
		3
fl Ł		400/230
	A	3478,00
Temperature		H

		fl Ł		fl Ł	
	"	"	"	"	L
AC 2500	17200,00	6000,00	2494,00	3320,00	2000,00
		fl Ł		fl Ł	
	"	"	"	"	L
AK 99	22800,00	9000	2800	3478/4452	2200

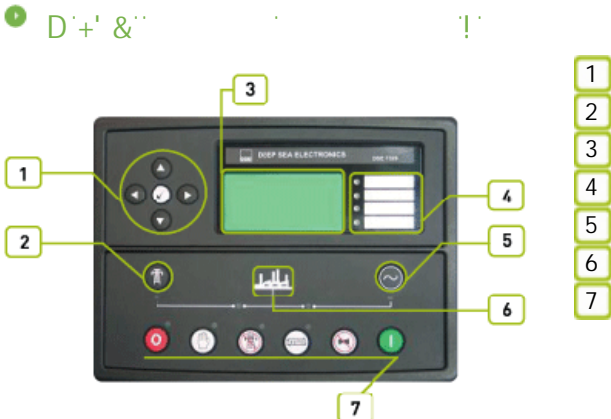

AC 2500

Cummins  
Stamford  
D+&

- 1. 8G9Ž + ' &\$Ž ) 5Z&&\$#&(\$
- 2.
- 3.
- 4. 8G9 + ' &\$ fi  
 &&\$ Ł "8G9 + ' &\$  
 "8G9 + ' &\$ 8G9 + ' &\$  
 Ž "
- 5. % &I \* ( " " žFG& žFG(, ) Ž " ž

# AC 2500

Cummins  
Stamford  
D+' &'



f@z@Bl  
f@!@!@ t

#

971

#

''  
''z'' ''z'' ''''

f@z@Bl

#

#



#

6G'9B'\*\$-\$) '\$

6G'9B'\*\$ \$\$!\*\$!&

6G'9B'\*\$ \$\$!\*\$!(

f&)(, t

f&%) +t

f&% \$t



GA 8'

!&+'''' ''

'' % , !&\*(' ''

)  
&(\$)


ž

ž

ž

# AC 2500

Cummins  
Stamford  
D+ & "

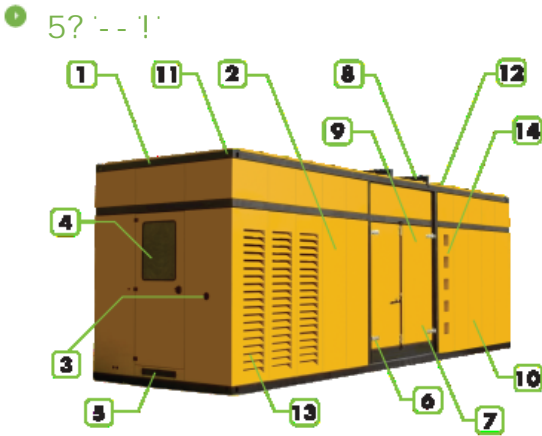

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3478/4452
	L	2200