

AC 700

Cummins
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC & \$\$\$#(#
z) \$ z' z' D:

	kw	kw	Amp
400/230	700,00	560,00	920,00


fP GDE GC,) &
fDF DE % \$! % % & GC " \$(** z& GC

Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

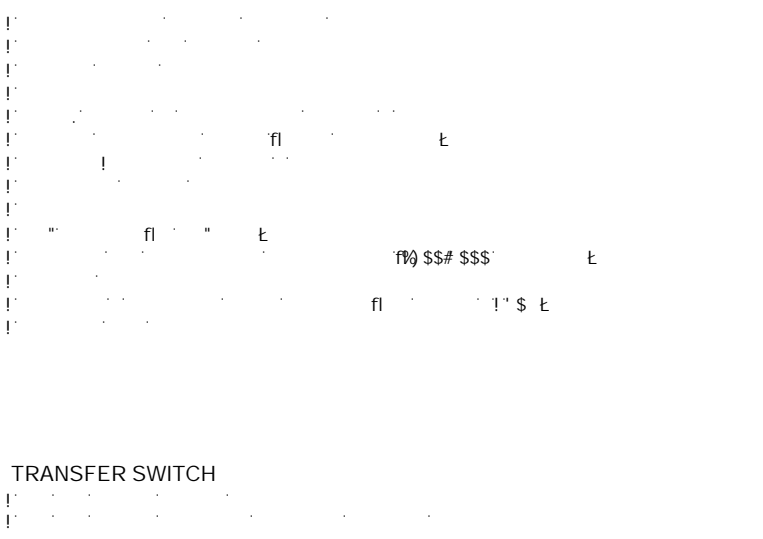

AC 700

Cummins
Mecc Alte
D+' &'


Manufacturer		Cummins		
Model		VTA 28 G5		
		% \$ \$	"# "	
		612,00 kw [820,00HP]		
	L	28,000		
	"	140 x 152		
		13,1:1		
	fl # ı	"# "	1500	
	fl ı	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	52,68		
	' # "	651,00		
fl ' # ı	' # "	122,88		
	° C	507,00		
		24 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "			
		140,00	104,00	73,00

		Mecc Alte		
		ECO 40-2L		
	Hz	50		
	"	680,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	981,00		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 700	5470,00	3740,00	1550,00	2266,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	7030,00	5297	1606	2656	1000

AC 700

Cummins
Mecc Alte
D+ & "

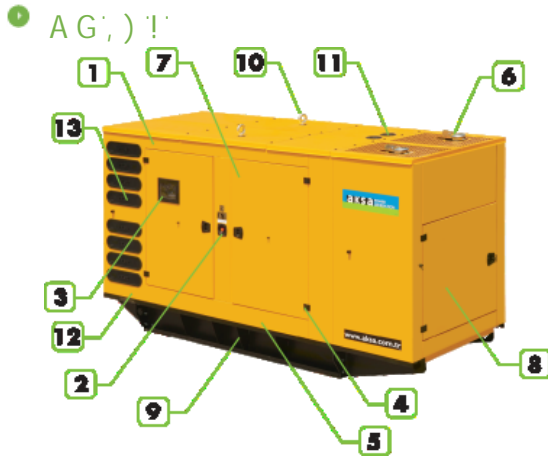

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000