

AC 110

Cummins
Mecc Alte
P 602



ISO8528	GC ;) &
SZUTEST	GC - \$\$\$
CE	


2000/14/EC	\$\$\$#(#
	z) \$ z' z' D:

	"	kw	"	kw	Amp
400/230	110,00	88,00	100,00	80,00	144,00

...	fP GDE
...	fDF DE
...	z & (
...	GC " \$ (*

Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately (for open sets)
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

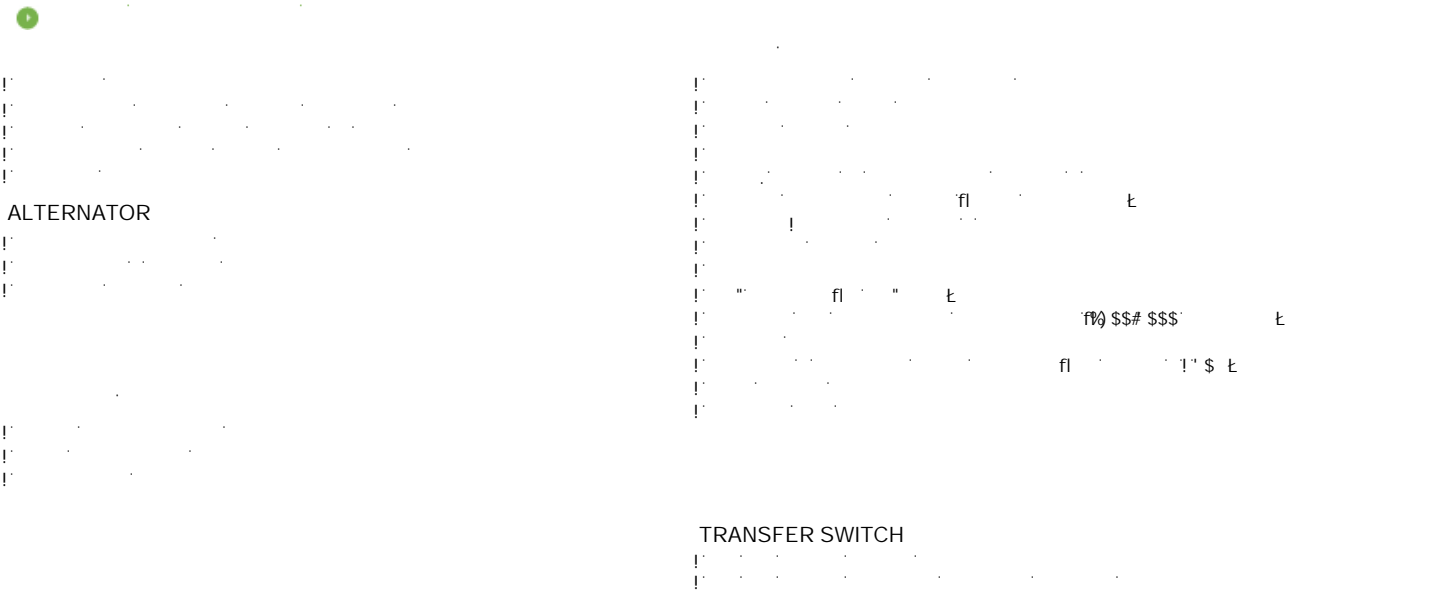

AC 110

Cummins
Mecc Alte
P 602

Manufacturer		Cummins		
Model		6BTA 5,9-G5		
		% \$ \$	"# "	
		102,00 kw [137,00HP]		
	L	5,900		
	"	102 x 120		
		17,6:1		
	fl # ı	"# "	1500	
	fl ı	L	16,40	
		L	19,80	
AbsorbedAirDischargeReSourceKey.Text	' # "	7,86		
	' # "	216,00		
	' # "	21,42		
	° C	533,00		
		12 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "	25,00	18,00	12,00

		Mecc Alte		
		ECP34 - 2S/4		
	Hz	50		
	"	105,00		
7 cg		0,80		
		3		
	fl ı	400/230		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 110	1250,00	2150,00	1050,00	1563,00	240,00
		fl ı		fl ı	
	"	"	"	"	L
AK 40	1600	3100	1113	1741	240

AC 110

Cummins
Mecc Alte
P 602

9B: #9
9b[]bY'gdYYX"
C]'dfYggi fY"
7cc'UbhY'a dYfUhi fY"
F i b' hja Y"
6UHYfmj c'rg"
7cbZ[i fUV'Y hja]b["
; 9B9F 5HCF
J c' hU[Y f@ @B' "
7i ffYbhf@&!@ ' "
: fYei YbVW"
A 5-BG
J c' hU[Y f@ @B' "
: fYei YbVW"
A U]bg'fYUXn"
A U]bg'YbUV'YX"
; Yb"GYhfYUXn"
; Yb"GYhYbUV'YX"

K 5F B-B;
7\Uf[Y Z]i fY"
6UHYfm@ck #:[\] c' hU[Y"
: U] 'hc' ghd"
@ck #:[\] [YbYfUhc'f] c' hU[Y"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
Cj Yf# bXYf'gdYYX"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
G<I H8CK BG
: U] 'hc' gUff"
9a Yf[YbVW'ghcd"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
Cj Yf# bXYf'gdYYX"
I bXYf#j Yf[YbYfUhc'f ZYei YbVW"
I bXYf#j Yf[YbYfUhc'f] c' hU[Y"
C]'dfYggi fY'gYbgcf'cdYb"
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"
9@97 HF =75@HF -D
: YbYfUhc'f] YfW ffYbh"


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k]h' h'Ya dYfUhi fYz
dfYggi fYz dYfVW'bhU[Y f'k Ufb]b[#]i h'Xck b# 'YVW'VW' h'f]dL
@c'WV'gYh]b['dUfUa YHfg'UbX'a cb]h'f]b['Zca 'D7 'hc
V'c'bfcc' a cXi 'Y'k]h' I G6 V'c'bbYVW]cb'fa Ul '* 'a H'

9'YVW]VW' GUZYhm#9A 7 'V'a dUfV]]hm6G'9B '* \$-) \$
9'YVW]VW' Vi g]bYgg'Yei]da Ybh'
6G'9B '*%\$ \$! *! & 9A 7 'ja a i b]mighUbXUfX"
6G'9B '*%\$ \$! *! ('9A 7 'Ya]gg]cb'ghUbXUfX

'6UHYfmVUf[Yf]g'a Ubi ZVW' fYX'k]h' 'gk]h'W]b[!a cXY'UbX'GA 8 'YVW'bc'c[mUbX'ih\Ug\] [\ YZ]VW'YbVW' 6UHYfmVUf[Yf
a cXY'gfci hdi hJ !=VUfUWV'f]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g'] 'Ua dYfz% z'] 'Zcf'%&j'c'hUbX'&+Z'] 'Zcf'&'('] '
#bdi h% , ' ! &* (j c'h57 "' Dfc]'bY'&(\$) \Ug'Z' 'mci hdi hg\chVW]hdfchVW]cb'UbX'ihVWb'VY'i gYX'Ug'U'VW'ffYbhgci fVW"
Dfc]'bY'%&\$) #&(\$) VUf[Yf'\Ug'\] [\ YZ]VW'YbVW'cb[']Z'Z' 'ck ZU]i fY'fUfYz'] [\ hk Y] [\ hUbX' 'ck \YUhfUX]UfYX']b
UVW'cfXUbW'k]h']'bYUf'U'fYbUf]j Yg' H\Y'VUf[Yf]g'Z]h'YX'k]h' U'dfchVW]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[Y'Z]
fY'UmV'c'] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei]ddYX'k]h' F: =Z]h'f'hc'fYXi VV'Y'YVW]VW'bc]gY'fUX]UfYX
Zca 'h'Y'XY'jVW"; Uj Ub]W' m]gc'UfYX']bdi hUbX'ci hdi h]m]d]VW'm(_J 'Zcf'\] [\ fY']UV]]m'

AC 110

Cummins
Mecc Alte
P 602

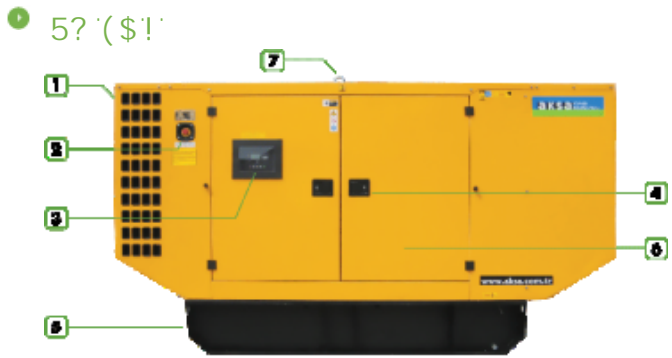

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1113
fl "L	"	3100
fl "L	"	1741
	L	240