

# APD 2100 M

Mitsubishi

D+' &''



ISO8528

GC', ) &-

SZUTEST

GC' - \$\$\$%

CE

2000/14/EC

&\$\$\$#( #

z) \$' z' z' D:

	"	kw	"	kw	Amp
400/230	2100,00	1680,00	1875,00	1500,00	2709,00

fPQDE'

'GC', ) &

fDF DE'

z&('

'GC

,) & z

%'s1

% ' %&

'GC' \$(\*\*

## Standard Specifications

- Water cooled, Diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Base frame design incorporates an integral fuel tank and anti-vibration isolators
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately(for open sets)
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

TRANSFER SWITCH

# APD 2100 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S16R-PTA2
		%\$\$' "# "
		1790,00 kw [2399,00HP]
	L	65,370
	"	170x180
		13,5:1
	fl # ı	"# " 1500
	fl "ı	L 230,00
		L 445,00
AbsorbedAirDischargeReSourceKey.Text	' # "	143,00
	' # "	2040,00
	° C	379,00
		24 V d.c.
	Load	%%\$ı
	# "	
		406,10

		ECO46-1L/4
	Hz	50
	"	2100,00
7cg'		0,80
		3
	fl ı	400/230

		fl "ı		fl "ı	
	"	"	"	"	L
APD 2100 M	14850,00	5200,00	2500,00	2900,00	2000,00
		fl "ı		fl "ı	
	"	"	"	"	L
AK 99	20100	9000	2800	3478/4452	2200

D+' &'

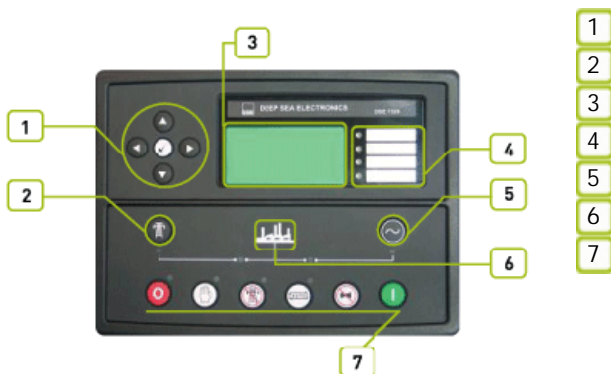

# APD 2100 M

Mitsubishi

D+' &'

- 1 8G9ž ' + ' &\$ž ) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9'+' &\$ ž fi  
&&\$ ž  
"8G9'+' &\$  
8G9'+' &\$ ž  
% &I '\* ( ž  
žFG&' &žFG(, ) ž ž

# APD 2100 M

Mitsubishi

D+' &'

f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

% , !&\*(

&(\$)

ž


ž

ž

# APD 2100 M

Mitsubishi

D+' &'

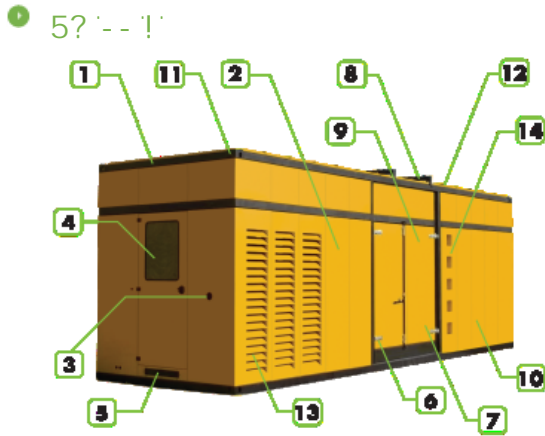

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3478/4452
	L	2200