

AC 880

Cummins
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

	kw	kw	Amp
400/230	880,00	704,00	1154,00

fP GDE

GC ;) &

fDF DE

z & (

GC

Standard Specifications

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

ALTERNATOR

TRANSFER SWITCH

AC 880

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QSK 23 G3		
		%\$\$' "# "		
		768,00 kw [1030,00HP]		
	L	23,150		
	"	170 x 170		
		16,0:1		
	fl # ı	"# "	1500	
	fl ı	L	103,00	
		L	120,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	53,30		
	' # "	625,80		
fl ' # ı	' # "	147,80		
	° C	543,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	161,00	121,00	85,00


		Mecc Alte		
		ECO 43-1SN/4		
	Hz	50		
	"	800,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	1154,00		
Temperature		H		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 880	5950,00	3950,00	1705,00	2225,00	1500,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
AK 90	9100,00	6500	2200	2353	850

AC 880

Cummins
Mecc Alte
D+' &'

1 D+' &'

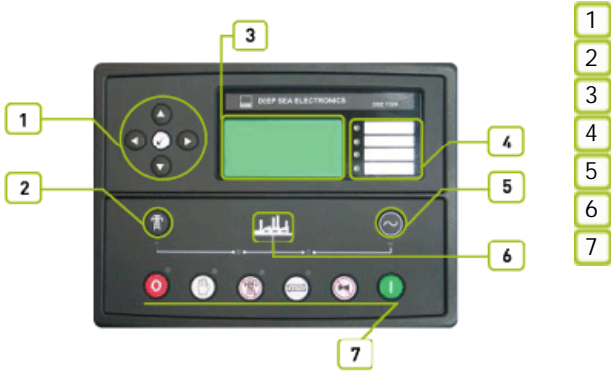

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fi
&&\$ ž
"8G9+' &\$ ž
8G9+' &\$ ž
% &1*(ž
žFG' &žFG(,) ž

AC 880

Cummins
Mecc Alte
D+ &

f@#@Bt
f@#@Bt

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 880

Cummins
Mecc Alte
D+ & "

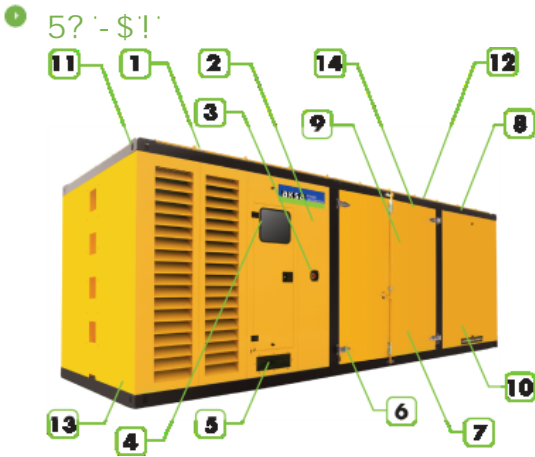

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850