

AC 55

Cummins
Mecc Alte
P 602

Manufacturer		Cummins		
Model		S3,8-G6		
		% \$ \$' "# "		
		53,70 kw [71,90HP]		
	L	3,800		
	"	97 x 128		
		17,5:1		
	fl # ı	"# "	1500	
	fl ı	L	11,00	
		L	14,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	3,60		
	' # "	82,00		
	' # "	4,20		
	° C	546,00		
		12 V d.c.		
	Load	% \$ \$ı	'+)ı) \$ı
	# "	12,80	9,50	6,50

		Mecc Alte
		ECO 32-1L/4
	Hz	50
	"	50,00
7 cg'		0,80
		3
	ıfl ı	400/230
Temperature		H

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 55	870,00	1780,00	950,00	1198,00	105,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
AK 30	1140	2470	1010	1461	100

AC 55

Cummins
Mecc Alte
P 602

9B: #9
9b[]bY'gdYYX"
C]'dfYggi fY"
7cc'UbhY'a dYfUhi fY"
F i b' hja Y"
6UHYfmj c'rg"
7cbZ[i fUVY' hja]b["
; 9B9F 5HCF
J c' hU[Y f@ @B' "
7i ffYbhf@&!@ E"
: fYei YbVW"
A 5-BG
J c' hU[Y f@ @B' "
: fYei YbVW"
A U]bg'fYUXn"
A U]bg'YbUV'YX"
; Yb"GYhfYUXn"
; Yb"GYhYbUV'YX"

K 5F B-B;
7\Uf[Y Z]i fY"
6UHYfm@ck #:[\] c' hU[Y"
: U] 'hc' ghd"
@ck #:[\] [YbYfUhc'f'j c' hU[Y"
I bXYf#j Yf[YbYfUhc'f'ZfYei YbVW"
Cj Yf# bXYf'gdYYX"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
G<I H8CK BG
: U] 'hc' gUff"
9a Yf[YbVW'ghcd"
@ck c]'dfYggi fY"
<][\ V'c'UbhY'a dYfUhi fY"
Cj Yf# bXYf'gdYYX"
I bXYf#j Yf[YbYfUhc'f'ZfYei YbVW"
I bXYf#j Yf[YbYfUhc'f' c' hU[Y"
C]'dfYggi fY'gYbgcf'cdYb"
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"
9@97 HF =75@HF -D
: YbYfUhc'f'c'j YfW'ffYbh"


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k]h' h'Ya dYfUhi fYz
dfYggi fYz dYfVW'bhU[Y f'k Ufb]b[#]i h'Xck b# 'YVW'VW' hf'dL
@c'W'gYh]b['dUfUa YHfg'UbX'a cb]hc'f]b['Zca 'D7' hc
V'c'bfcc' a cXi 'Y'k]h' I G6 V'c'bbYVW]cb'fa Ul '* 'a H'

9'YVW]VW' GUZYhm#9A 7 V'c'a dUfV]]hm6G'9B '* \$-) \$
9'YVW]VW' Vi g]bYgg'Yei]da Ybh'
6G'9B '*%\$!*&9A 7]a a i b]mighUbxUfX"
6G'9B '*%\$!*('9A 7 Ya]gg]cb'ghUbxUfX

'6UHYfmVUf[Yf]g'a Ubi ZVW' fYX'k]h' 'gk]hVW]b[!a cXY'UbX'GA 8 'YVW'bc'c[mUbx'ih\Ug\] [\ YZ]VW'YbVW' 6UHYfmVUf[Yf
a cXY'gfci hdi hJ !=VUfUWV'f]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g']'Ua dYfz% z']'Zcf'%&j'c'hUbX'&+Z']'Zcf'&'(]'
#bdi h% , ' !&* (j c'h57 "'Dfc]bY'&(\$) \Ug'Z' mci hdi hg\chVW]hdfchVW]cb'UbX'ihVWb VY i gYX'Ug'U'W'ffYbhgci fVW"
Dfc]bY'%&\$) #&(\$) VUf[Yf\Ug\] [\ YZ]VW'YbVW'cb["]Z'Z' 'ck ZU]i fY'fUfYz'] [\ hk Y] [\ hUbX' 'ck \ YUhfUX]UfYX']b
UWV'cfXUbW'k]h']'bYUf'U'HYfbU]h'j Yg' H\Y'VUf[Yf]g'Z]hYX'k]h' U'dfchVW]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[Y'Z]
fY'UmV'c] VYhk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\YmUfY'Yei]ddYX'k]h' F: =Z]hYf'hc'fYXi VV'Y'YVW]VW'bc]gY'fUX]UfYX
Zca 'h'Y'XY'jVW"; Uj Ub]W' m]gc'UfYX']bdi hUbX'ci hdi h]md]VW'm(_J'Zcf'\] [\ fY']UV]]m'

AC 55

Cummins
Mecc Alte
P 602

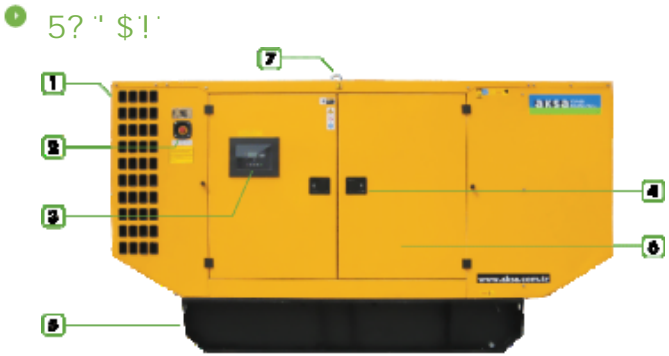

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Base frame -fuel tank.
- 6 Lockable, large doors on each side.
- 7 Lifting Points

	"	1010
fl "L	"	2470
fl "L	"	1461
	L	100