

# APD 2500 M

Mitsubishi

D+ &



ISO8528

GC , ) &

CE

2000/14/EC

&\$\$\$#( #

z) \$ z'z' D:

	"	kw	"	kw	Amp
400/230	2500,00	2000,00	2250,00	1800,00	3251,00

fPQDE

=GC , ) &

, ) & z

fDF D

%&

=GC " \$(\*\*

z&(

=GC

## Standard Specifications

- Water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for rotating and hot parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine coolant heater
- Steel base frame and anti-vibration isolators
- Spare external fuel tank (open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation
- Generators Sets' voltage and frequency regulation comply with ISO 8528-5
- Generators Sets' can take 100% load at one step according to NFPA110

TRANSFER SWITCH

# APD 2500 M


Mitsubishi

D+' &'

Manufacturer		Mitsubishi
Model		S16R2-PTAW
		%\$\$' "# "
		2167,00 kw [2905,00HP]
	L	79,900
	"	170x220
		14:1
	fl # ı	"# " 1500
	fl ı	L 290,00
		L 400,00
AbsorbedAirDischargeReSourceKey.Text	' # "	188,00
	' # "	2500,00
		24 V d.c.
	Load	%\$\$ı
	# "	
		469,80

		ECO46-1,5L/4
	Hz	50
	"	2300,00
7 cg'		0,80
		3
	fl ı	400/230

		fl ı		fl ı	
	"	"	"	"	L
APD 2500 M	15700,00	6200,00	2200,00	2800,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 99	21300	9000	2800	3478/4452	2200

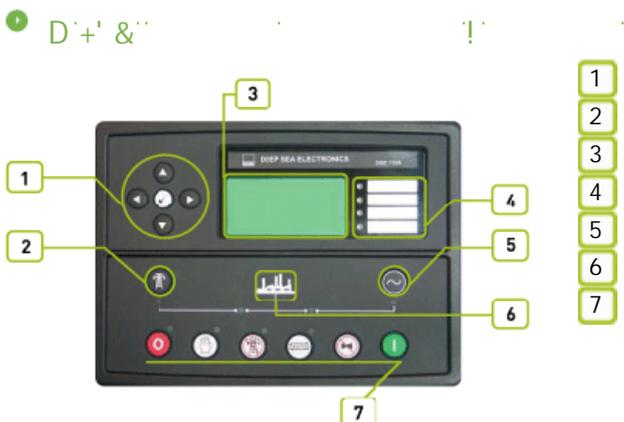




# APD 2500 M

Mitsubishi


D+&''

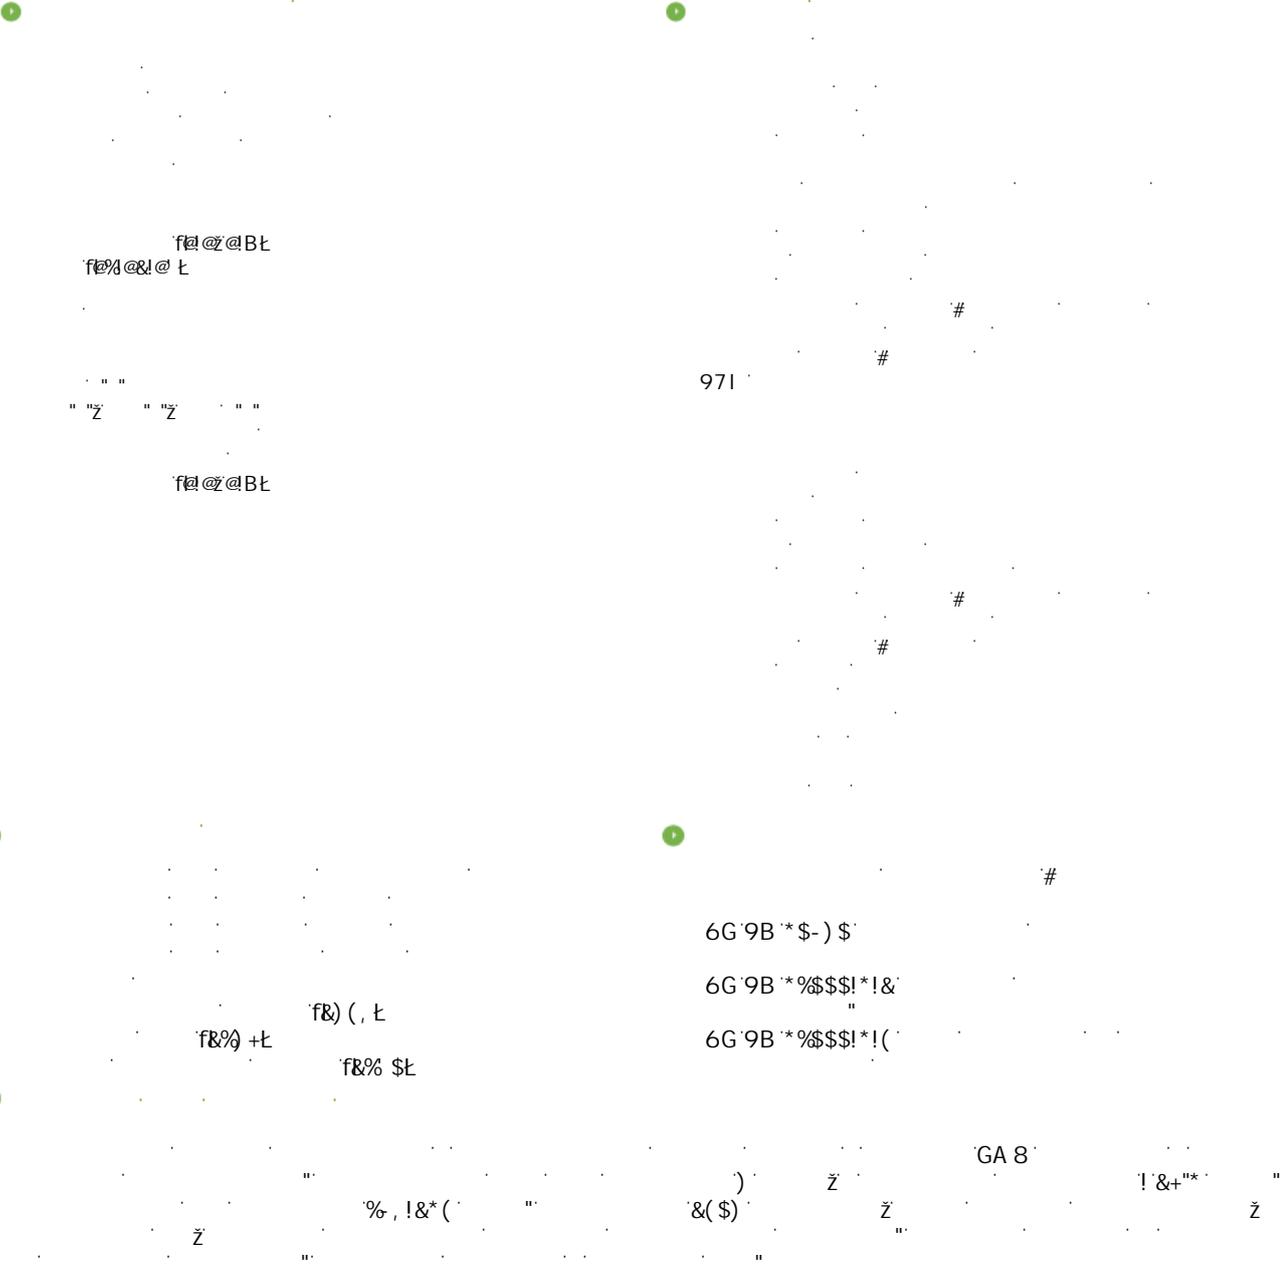

# APD 2500 M

Mitsubishi

D+' &'

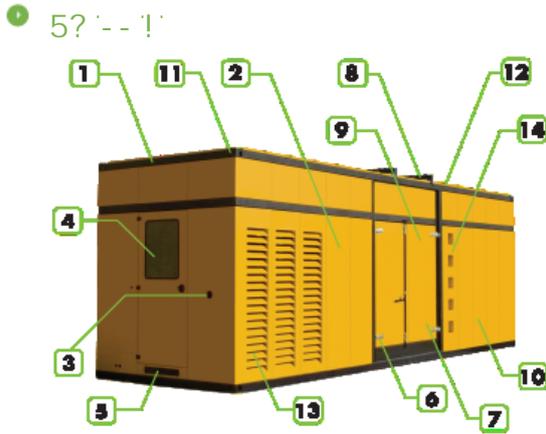

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3478/4452
	L	2200